




Manufacturer of pneumatic impact tools and hydraulic tools for mines, quarries, construction industry, steelworks and foundries.

AUTOMATIC WATER SEPARATOR AOV3

Automatic water separator serves to separate water from the pressurized air on its way from the compressed air source to the pneumatic hammer.

Simple operation and friendly design – water separation efficiency along with a long service life make it an indispensable tool where water from compressed air needs to be separated.

AOV 3 is used for a maximum permissible air pressure of 0.7MPa.

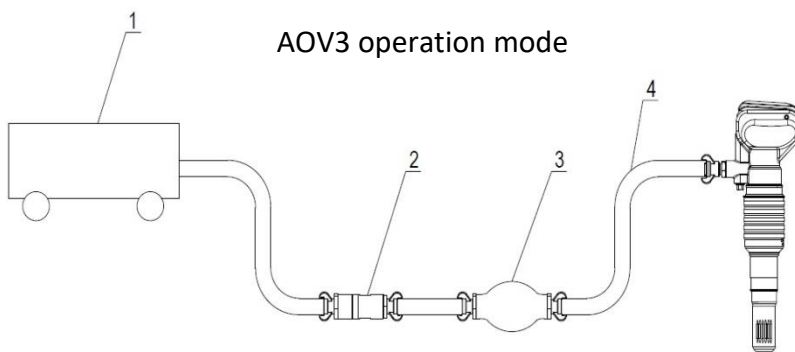

1. Source of compressed air
2. Water separator AOV3 PERMON (keep the position following the red arrow!)
3. Lubricator LR3 PERMON (optional)
4. Compressed air hose max. 10 meters between oiler and pneumatic hammer



Technical data and main parameters	Unit	AOV 3
Weight	kg	1,4
Max air flow	m ³ min ⁻¹	3,3
Coupling (standard)	-	Quick coupling
Ordering code (with quick coupling)		9555-080
Coupling (customized)	-	Inner thread G 3/4"
Ordering code (thread coupling)		9555-090

www.permon.cz

e-mail : prodej@permon.cz

e-mail : export@permon.cz

Roztoky 217, 270 23 Křivoklát, Česká republika

for the Czech Rep. and SK

for other territories

T: + 420 313 521 567

T: + 420 313 521 563