

# 3/4" Impact Wrench


# SI-1550

<b>Maximum Torque</b> Nm/(ft-lb)	1,650/(1,217)
<b>Working Torque Range</b> Nm/(ft-lb)	0-1,320/(0-974)
<b>Bolt Cap</b> mm/(in.)	24/(15/16)
<b>Free Speed</b> r.p.m.	(F)6,000(R)6,500
<b>Weight</b> kg/(lb)	3.25/(7.7)
<b>Noise Level *</b> dBA/(power)	92/(103)
<b>Vibration a/k *</b> m/s2	11.2/1.6
<b>Avg.Air Consumption</b> CFM/(L/S)	8.0/(3.8)
<b>Air Inlet Size</b> in.	3/8
<b>Hose Size</b> mm/(in.)	13/(1/2)

- Rubber grip absorbs the vibration remarkably well and also protects your hand from the cold.
- 4 positions regulator dial for easy adjustment and it has an forward, reverse for easy adjustment.



Maximum  
Torque :  
**1,650Nm**

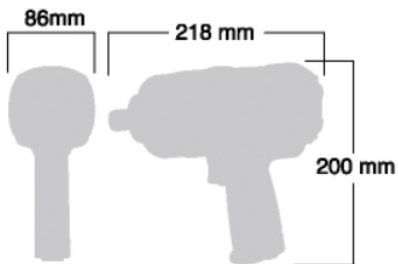

**4 Position speed selector &  
Forward/Reverse selector**

