




Manufacturer of pneumatic impact tools and hydraulic tools for mines, quarries, construction industry, steelworks and foundries.

## TECHNICKÉ ÚDAJE – TECHNISCHE DATEN – TECHNICAL DATA

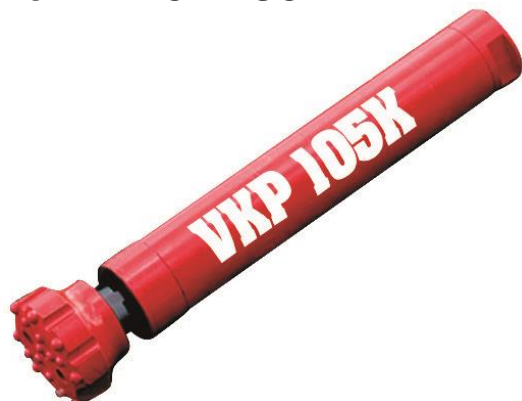

# VKP 105K DHD340A DTH Hammer

### APPLICATION

VKP105K DHD340A - Extremely short hammer for drilling in restricted spaces.

VKP105K DHD340A Down-The-Hole hammer is designed for drilling holes in low to high strength materials, especially in unaccessible places.

The hammer cannot drill in saturated borehole environments or under water.

Technické údaje – Technical data	ISO	VKP 105K DHD340A
Hmotnost - Weight	kg	20
Spotřeba vzduchu - Air consumption	m <sup>3</sup> .min <sup>-1</sup>	2.8(0,6MPa) / 6.5(1,2MPa)
Frekvence úderů - Impact rate	Hz	29(0,6MPa) / 40(1,2MPa)
Provozní přetlak vzduchu - Oper. air pressure	MPa	0.6 – 1.2
Vnější průměr- Hammer Outside Diameter	mm	97
Délka - Length	mm	550
Rozměr plochy pro klíč - Backhead Spanner Flat Size	mm	80
Stopka korunky - Drill Bit Shank Type		DHD 340A
Rozměr korunky - Bore Hole Diameter	mm	110 – 130
Hmotnost pístu - Piston Weight	kg	3,67
Vyřazení válce - Wear Sleeve Discard Limit	mm	94
Připojovací závit - Connecting thread		2 <sup>3</sup> / <sub>8</sub> " A.P.I Reg box
Objednací číslo - Ordering code		9550-410

www.permon.cz

e-mail : prodej@permon.cz

e-mail : export@permon.cz

Roztoky 217, 270 23 Krivoklát, Česká republika

for the Czech Rep. and SK

for other territories

v:06.2020

T: + 420 313 521 567

T: + 420 313 521 563